



Touch-Screen Flex Mount On-Cart Tablet Holder



Locking system for security



Two cart locations for installation; 360° cradle rotation

video ►



EASY-VIEW AND FLEXIBLE ARM

Line-of-sight positioning provides easy viewing. Aluminum coil enables angling of the device cradle up-and-down or back-and-forth for customized comfort and optimum visibility.

NO SLIPPING, WOBBLING

Sturdy construction maintains the device position once situated and does not wobble or slip.

THEFT-SECURE LOCKING

Devices can be locked into the cradle, which is securely attached to the workstation, making it virtually theft-proof.

360° CRADLE ROTATION

The device cradle rotates around the flexible arm to enable either landscape or portrait viewing.

PADDING PROTECTS DEVICE

Light-weight aluminum cradle is padded to protect the touch screen device.

TOUCH SCREEN FLEX MOUNT DETAILS



CRADLE EASILY ADJUSTS: 7.87" TO 12.2"

Quickly adjust the opening of the device cradle to securely hold the touch screen dimensions.

- Inside of grip handles have padding to protect the device.



360° CRADLE ROTATION

Device cradle rotates 360° for either landscape or portrait positioning.



THEFT-SECURE: LOCKS INTO CART SUPPORT

Lock the device to the holder, which is securely attached to workstation, making it virtually theft-proof.



FLEX ARM TWISTS AND TURNS

Aluminum coiled arm provides maximum flexibility.


- Bend the arm up-and-down or back-and-forth to achieve the angle most comfortable for user.



FLAT INSTALLATION BAR FOR MAXIMUM STABILITY

No protruding edges or noticable gaps between cart and installation bar.

Advanced engineering insures maximum stability: no wobbles, no slipping.

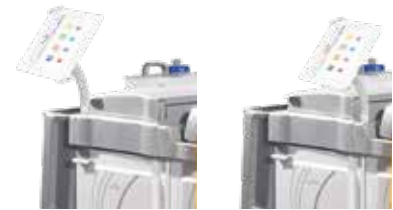


Front

Middle

TWO INSTALL LOCATION OPTIONS

Choose installation location on the cart which best meets your needs.

- 1) Between supply tower and Equodose Mobile Microfiber Charging System.
- 2) Between back trash compartment and supply tower.

PRODUCT (S)	ITEM #	DESCRIPTION	Unit of Measure	Case Pack
	0000SM00401	TOUCH-SCREEN FLEX HOLDER INCLUDES TWO (2) LOCKING KEYS AND INSTALLATION SCREWS. 18.3" (install bar) x 12.2" (height) x 7.87" to 12.2" (cradle width)	case	1